

# THERMASOL

*Cleanse Your Body. Purify Your Soul.*

Headquarters & Technical Support  
2255 Union Place, Simi Valley, CA 93065 – (800) 776.0711 (805) 520.2468



Eastern Sales Office  
26 Industrial Avenue, Fairview, NJ 07022 – (800) 631.1601 (201) 941.8222

[www.thermasol.com](http://www.thermasol.com)

## Speaker Installation Instructions

### Speaker specifications

- Impedance, 4 Ohms
- 100Hz ~ 20k Hz response frequency
- 40 Watt Max Input, 20 Watt Rated input
- Frequency response 75-22,000 Hz

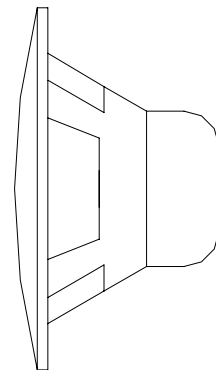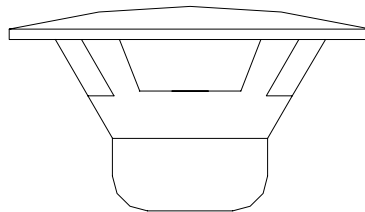

### Parts Enclosed:

- 2 – 4” full range speakers
- 4 – # 8 x 1” Mounting screws
- 2 – 9 feet speaker wire patch cables
- 

### Material Needed:

- 4” hole saw bit (or tile cutting bit)
- Drill
- Phillips screw driver
- Wire strippers
- Other Tools as required

**Warning: Ensure that all-existing electrical wiring and plumbing is clear of desired holes to drill for mounting of speakers.**

1. "Use the attached template (Page 3) to assist in mounting your ThermoSol speakers.
2. Once you have the two templates cutout, attach them to the mounting surface with adhesive tape in your desired locations. Be sure to use an adhesive that doesn't damage the underlying material.
3. Follow the notes on the template picture below for correct location, and use."

