GENERAL SPECIFICATIONS:

60" x 32" x 18.25" **Tub Size**

Bathing Well length: 51.75" top / 46" bottom

width: 24.25" top / 22" bottom

depth at overflow: 14.25"

Plumbed Weight 100 lbs / 45.36 kg Soaker Weight 75 lbs / 34.02 kg

Average Fill 30 gal to above jet level **Maximum Fill** 57 gal to overflow Undermountable Yes (with no Aromatherapy)

NOTE: Filling this tub to the maximum may require an above average size or dedicated water heater.

ELECTRICAL SPECIFICATIONS:

Required Electrical Service 110 Volt

Air Bath or Standard Whirlpool 1-15 amp GFCI

Standard Whirlpool w/Air 2-15 amp GFCI

Ultra-Therapy 2-15 amp GFCI Ultra-Therapy w/Air 2-20 amp GFCI


CSA Certified C/US; NAHB Certified; ANSI Z124.1 for plastic tubs and ANSI 112.19.7 for whirlpool components.

NOTE: See electrical specifications page for electrical requirements

Andrea® 6 MTDS-96


60" x 32" x 18.25"



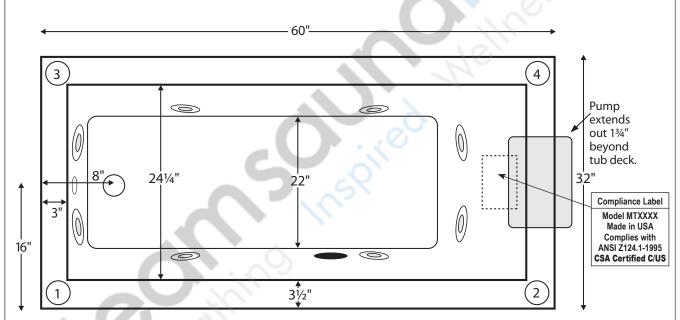

Numbered locations on tub deck are possible Fill-Flush, Hand-Held Shower or Breda locations. Pump extends out approximately 1 3/4" beyond tub deck.

Shown with Ultra-Therapy Package.

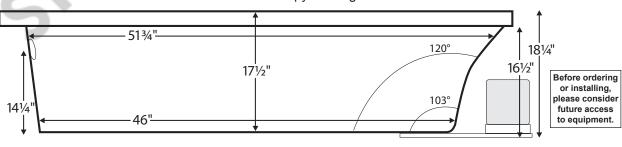

IMPORTANT: If you are planning to use a glass enclosure, MTI must be advised when ordering for possible relocation of controls.

INSTALLATION: Add 1"-3" to height of tub for bedding compound. MTI recommends Quickrete Sand Mix. Air Baths add approximately 2"-3" to height of tub. Please measure tub before building tub decking. Suction and control locations may vary. Drawing shows best pump location. Alternate locations available — call MTI for details. Measurements are ± 1/2" and are subject to change without notice. Data herein supersedes all previous prior to publication date shown below. Tubs with more than one pump or blower will require additional service access.

