GENERAL SPECIFICATIONS:

Tub Size 71.75" x 41.875" x 20" **Bathing Well** length: 58" top / 42.5" bottom

width: 27.625" top / 23.5" bottom

depth at overflow: 16.5" **Plumbed Weight** 125 lbs / 56.69 kg Soaker Weight 95 lbs / 43.0 kg Average Fill 60 gal to above jet level **Maximum Fill** 100 gal to overflow **Undermountable** Yes (with no Aromatherapy)

NOTE: Filling this tub to the maximum may require an above average

NOTE: Not recommended as a tub / shower combination.

ELECTRICAL SPECIFICATIONS:

Required Electrical Service 110 Volt

Air Bath or Standard Whirlpool 1-15 amp GFCI

Standard Whirlpool w/Air 2-15 amp GFCI Ultra-Therapy 2-20 amp GFCI 2-20 amp GFCI Ultra-Therapy w/Air


CSA Certified C/US; NAHB Certified; ANSI Z124.1 for plastic tubs

of options

Metro 1 MTDS-83

71.75" x 41.875" x 20"



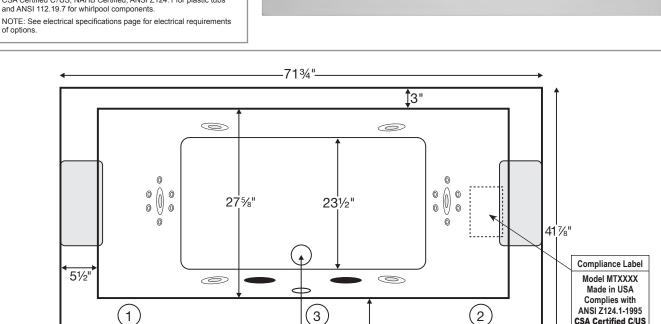


35%" Numbered locations on tub deck are possible Fill-Flush, Hand-Held Shower or Breda locations.

161/2"

Shown with Ultra-Therapy Package.

NOTE: When the Metro 1 is installed using the contemporary tub surround with front glass shelves, wall-mounted filler valves are recommended. Additional access must be provided when a combination or Ultra package is ordered.

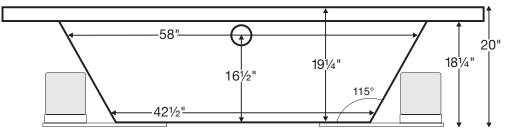

Before ordering or installing, please consider future access to equipment.

CSA Certified C/US

IMPORTANT: If you are planning to use a glass enclosure, MTI must be advised when ordering for possible relocation of controls.

INSTALLATION: Add 1"-3" to height of tub for bedding compound. MTI recommends Quickrete Sand Mix. Air Baths add approximately 2"-3" to height of tub. Please measure tub before building tub decking. Suction and control locations may vary. Drawing shows best pump location. Alternate locations available — call MTI for details. Measurements are ± 1/2" and are subject to change without notice. Data herein supersedes all previous prior to publication date shown below. Tubs with more than one pump or blower will require additional service access.

