

# mr.steam®speakers

## Installation Instructions

## Model MS-Speaker


- Cut speaker mounting hole using the template provided

**! CAUTION** All audio wiring shall be installed in accordance with National Electric Code and local electrical codes.

- Attached the “+” speaker wire from the stereo to the “+” terminal of the speaker. The “+” terminal is identified by a red dot.
- Attach the “-” speaker wire from the stereo to the “-” terminal of the speaker.
- Test speakers before securing to wall.

- Apply a bead of silicone RTV around the edge of the mounting hole as shown in the diagram to obtain a watertight seal.
- Remove the front grill of the speaker, and fit the speaker into the speaker-mounting hole.
- Secure the speaker in place using the stainless steel mounting screws provided.
- Apply the black butyl adhesive to the inside edge of the speaker as shown, to attach the grill to the speaker.
- Replace the speaker grills by pressing them into the butyl adhesive.
- Let the silicone cure per manufacture's instructions before using steam room.

**IMPORTANT:** Do not place speakers in direct contact with water or steam.

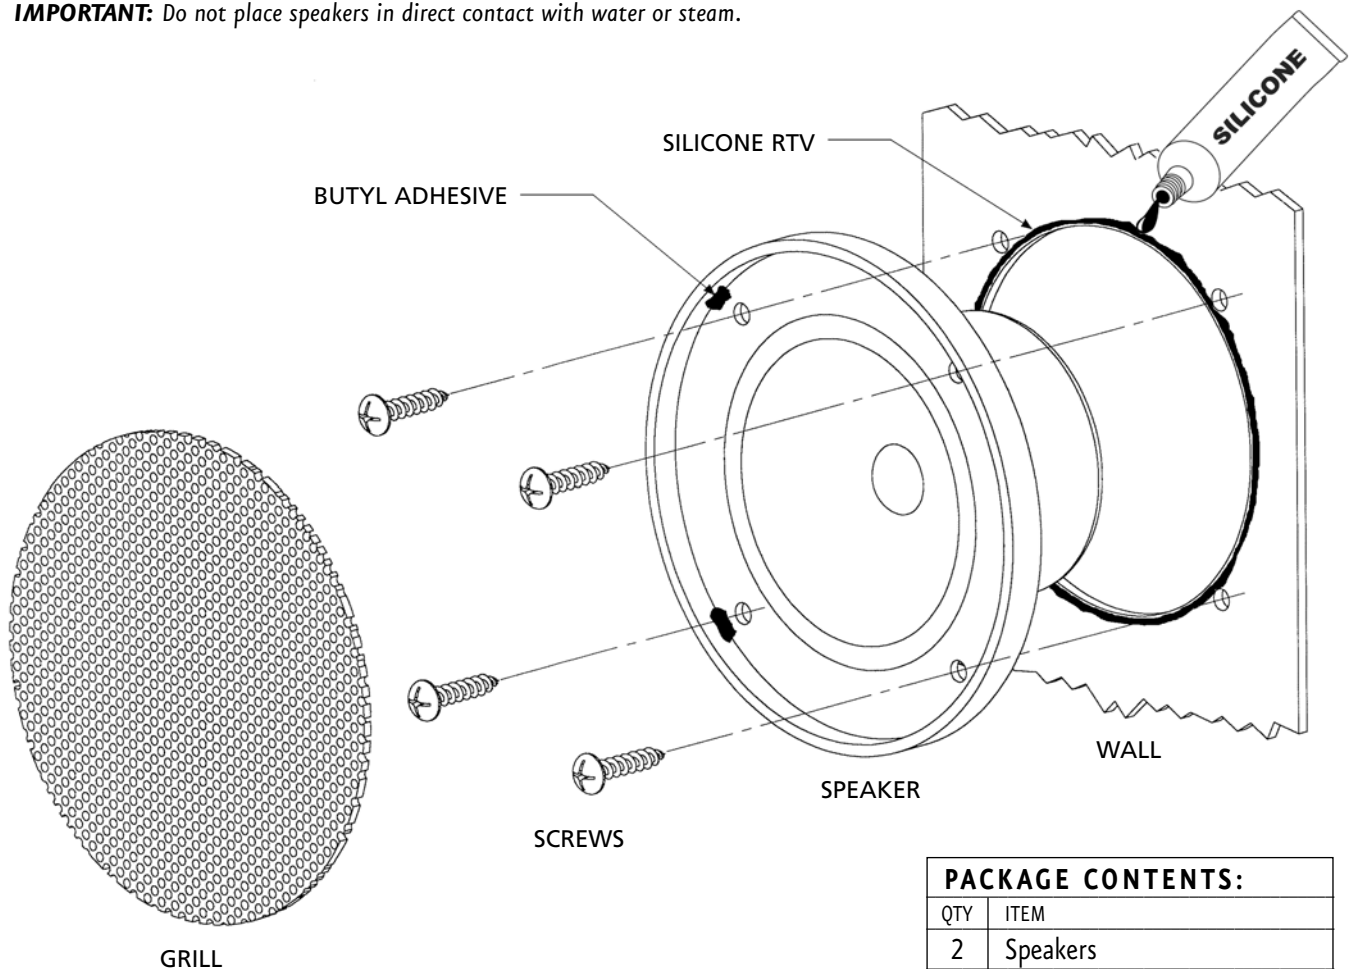

### PACKAGE CONTENTS:

QTY	ITEM
2	Speakers
8	2-inch screws
8	Butyl Adhesive Squares
1	Installation Manual