

Sundowner MTDS-37

75.5" x 41.5" x 20.875"

GENERAL SPECIFICATIONS:

Tub Size	75.5" x 41.5" x 20.875"
Bathing Well	length: 64" top / 48.25" bottom width: 33" top / 28.25" bottom depth at overflow: 16.5"
Plumbed Weight	185 lbs / 83.99 kg
Soaker Weight	120 lbs / 54.48 kg
Average Fill	47 gal to above jet level
Maximum Fill	87 gal to overflow
Undermountable	No

NOTE: Filling this tub to the maximum may require an above average size or dedicated water heater.

NOTE: Not recommended as a tub / shower combination.

ELECTRICAL SPECIFICATIONS:


Required Electrical Service	110 Volt
Air Bath or Standard Whirlpool	1-15 amp GFCI
Standard Whirlpool w/Air	1-15 amp GFCI & 1-20 amp GFCI
Ultra-Therapy	2-20 amp GFCI
Ultra-Therapy w/Air	2-20 amp GFCI

CSA Certified C/US; NAHB Certified; ANSI Z124.1 for plastic tubs and ANSI 112.19.7 for whirlpool components.

NOTE: See electrical specifications page for electrical requirements of options.




Sundowner includes as standard 4 straight acrylic grab bars. Shown with Standard Therapy Package and Chrome grab bar upgrade.

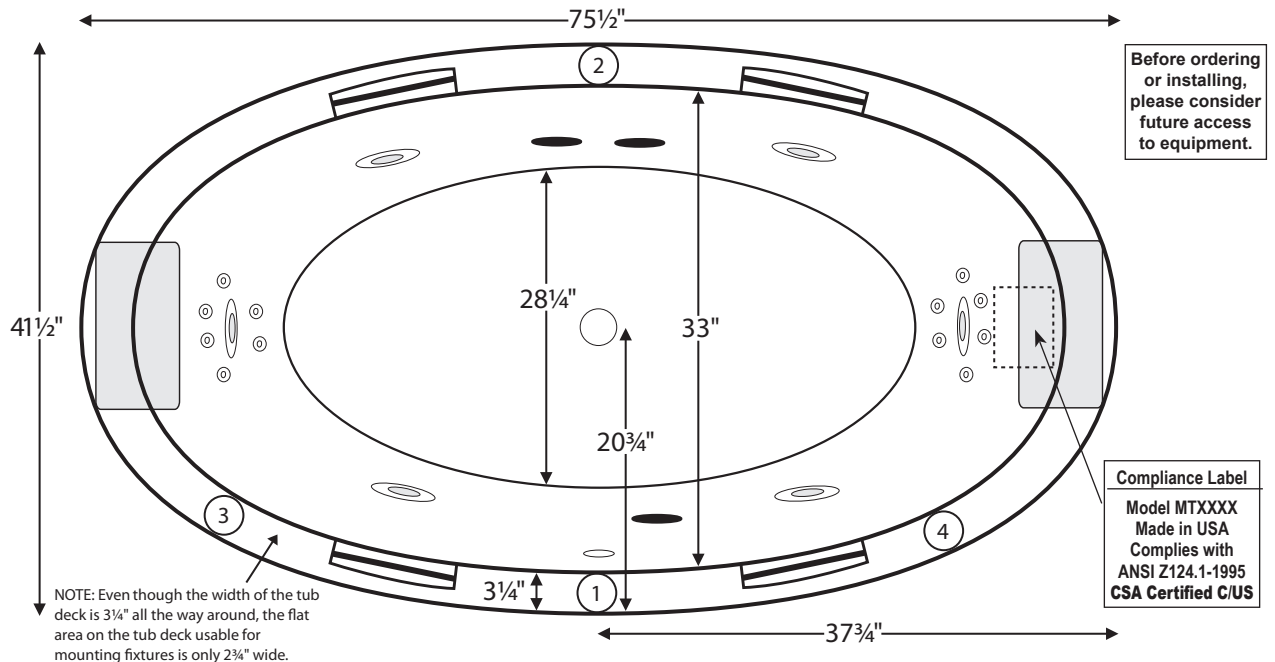

NOTE: Even though the width of the tub deck is 3 1/4" all the way around, the flat area on the tub deck usable for mounting fixtures is only 2 3/4" wide.

Numbered locations on tub deck are possible Fill-Flush, Hand-Held Shower or Breda locations.

Shown with Ultra-Therapy Package.

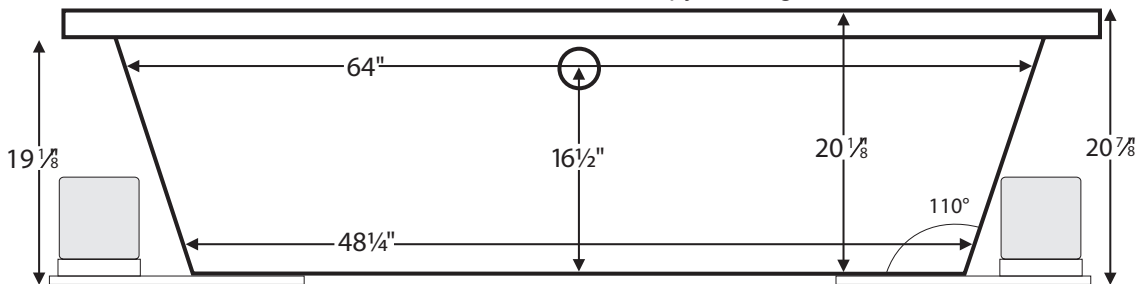

INSTALLATION: Add 1"-3" to height of tub for bedding compound. MTI recommends Quikcrete Sand Mix. **Air Baths add approximately 2"-3" to height of tub.** Please measure tub before building tub decking. Suction and control locations may vary. Drawing shows best pump location. Alternate locations available—call MTI for details. Measurements are ± 1/2" and are subject to change without notice. Data herein supersedes all previous prior to publication date shown below. Tubs with more than one pump or blower will require additional service access.