




HOTASS SAUNAS

**Sauna Valance Light 2x4/2x6
Installation and Operation Manual**

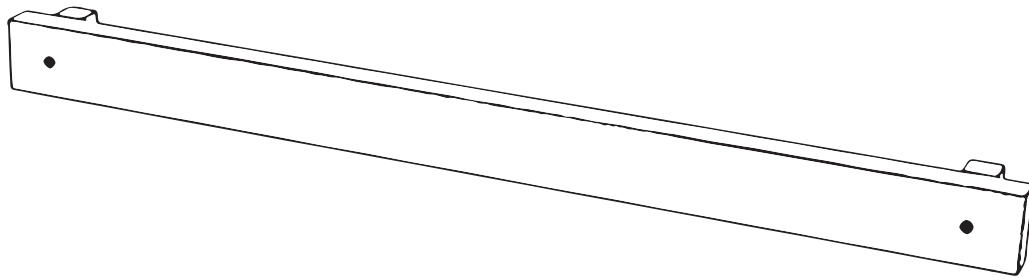


INSTALLATION CONSIDERATIONS

- **Note:** Prior to any work on the fixture, turn off electricity at the fuse or breaker box.
- Locate transformer in accessible dry location. Do NOT locate in attic or inside the sauna. Dimmer switches are not compatible with valance light.
- Fixture lengths and wires may NOT be field cut. **Either will void warranty.**
- HotAss Saunas shall not be responsible should products be modified without prior authorization.


INSTALLATION INSTRUCTIONS

1. Table test system prior to installation.
2. Run a 120VAC 15 amp circuit to a dry, accessible location.
3. 2x4 blocking is recommended for the light fixture. **Note:** Light fixture must keep a minimum of 12" from the ceiling.
4. Install junction box near blocking (or desired light fixture location) to make electrical connection.
5. Feed extension cable from light fixture location to dry, accessible location.
6. Mount light fixture to wall / blocking using provided 3-3/4" stainless steel screws. Screws require a bugel head. 12" clearance from ceiling is required.
7. Cap screw locations with Wood Dowels.
8. Connect extension cable to transformer.

Sauna

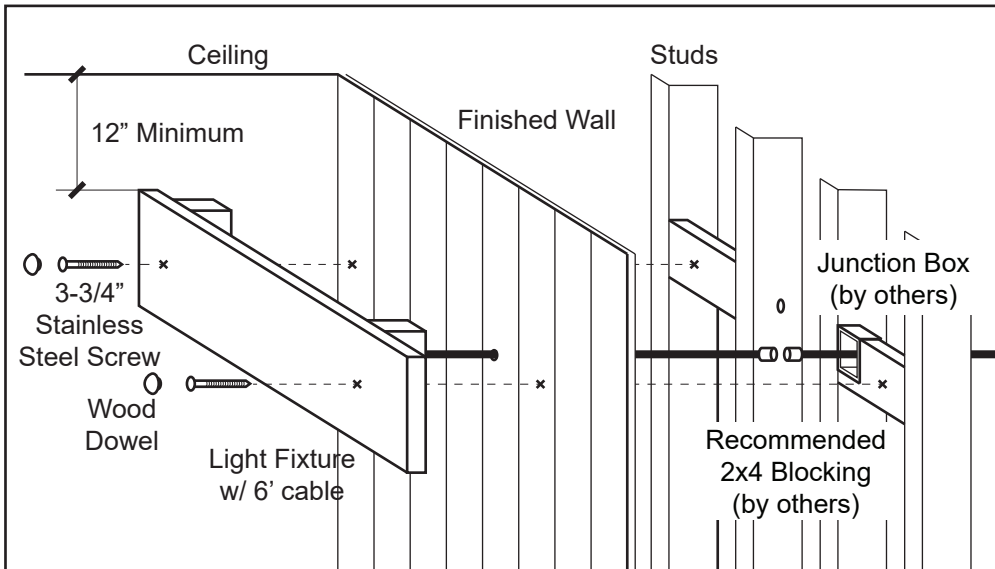

Accessible, ventilated area

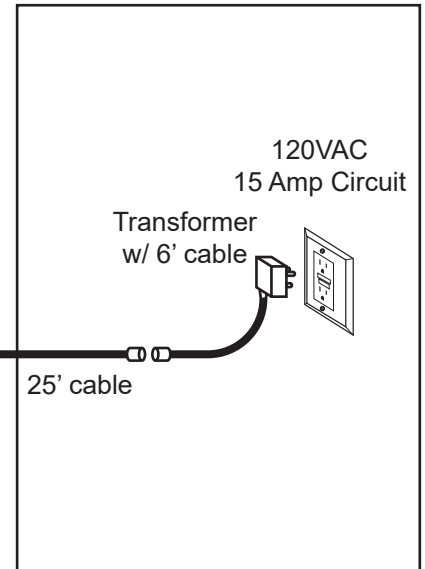

Note: Available in 48" or 96" length.