

# BATHOLOGY

rediscover bathing



## **Spectrum 620 & 626**

Mounted Salt Panel

Installation and Operation Manual

## Contents

Installation Considerations -----	3
Installation - Overivew -----	4
Installation - Himalayan Salt Panel -----	5
Specifications -----	6
Replacement Parts -----	6
Notes -----	7

## Installation Considerations

Please read this manual in its entirety prior to installation

**CAUTION** Carefully review all installation options and instructions before proceeding.

**CAUTION** For safety purposes, use safety goggles at all times.

**WARNING** If there is any risk of uninsulated electrical connections in your wall / ceiling area, use insulating gloves.

**! IMPORTANT** Prior to installation, consider the placement carefully, taking into account the location of electrical, plumbing, and other fixture

**! IMPORTANT** The Spectrum 620 requires minimum of 4” at both ends to insert or remove center salt block for mounting or removing panel.


# Spectrum 620 & 626

## Installation - Overview

**Note:** It is recommended that all electrical equipment be tested prior to installation.

**Note:** Illustration below showcases Spectrum 620 Himalayan Salt Panel Assembly which measures 48x12. Spectrum 626 is similar, but measures 16x16. Surface mount shown.

Sauna Environment

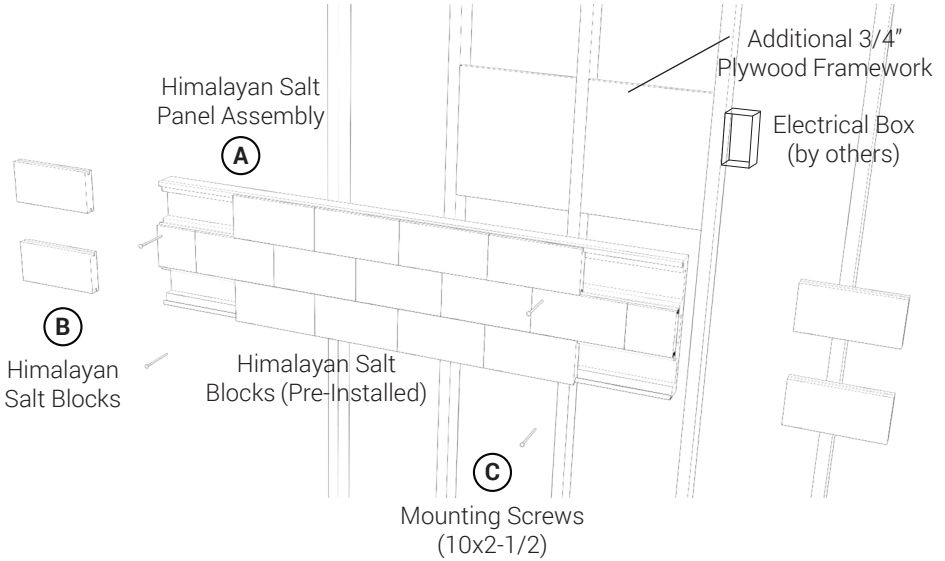

### Package Includes

Spectrum 620		
Item	Quantity	Description
A	1	Himalayan Salt Panel Assembly (Salt Pre-Installed)
B	4	Himalayan Salt Blocks
C	4	Mounting Screws (10x2-1/2)

Spectrum 620		
Item	Quantity	Description
A	1	Himalayan Salt Panel Assembly (Salt Pre-Installed)
B	4	Himalayan Salt Blocks
C	4	Mounting Screws (10x2-1/2)

## **Installation - Himalayan Salt Panel**

1. From determined Salt Panel Assembly (A) location, mark a level line for height of Salt Panel Assembly (A). (Helpful Tip: Use a piece of 2x4, level and secure to wall at determined height temporarily to be used as a ledger to support Salt Panel Assembly (A))
2. The Salt Panel Assembly (A) fixture may weigh up to 55 lbs. and require additional framework or support.  $\frac{3}{4}$ " Plywood is recommended to help support the weight of the fixture(s). See diagram on page 4.
3. Mount Salt Panel Assembly (A) onto wall securing with provided Mounting Screws (C) into predrilled mounting holes.
4. After mounting Salt Panel Assembly (A) slide in 4 Salt Blocks (B) over Mounting Screw (C) locations.
5. Repeat this process for each additional Himalayan Salt Panel Assembly, if any.

## Specifications

### Salt Block

**Composition:** Himalayan Salt

**Dimensions:** 3-7/8" x 7-7/8"

### Himalayan Salt Panel

**Dimensions (620):** 11-5/8"H x  
47-1/4"W x 2-5/8"D

**Dimensions (626):** 15-1/2"H x  
15-3/4"W x 2-5/8"D

**Composition:** Maple Plywood,  
Aluminum

### Mounting Screws

**Size:** #10 x 2-1/2"

## Replacement Parts

Contact your Bathology  
representative for Spectrum  
620 / 626 Mounted Salt Panel  
replacement parts.

800-957-2862

[www.Bathology.com](http://www.Bathology.com)



# BATHOLOGY

rediscover bathing

[www.Bathology.com](http://www.Bathology.com) 800-957-2862

A division of Bathing Brands, Inc.