




Cube Luxury Series CL3G Outdoor Sauna 52D" x 54W" x 82H"



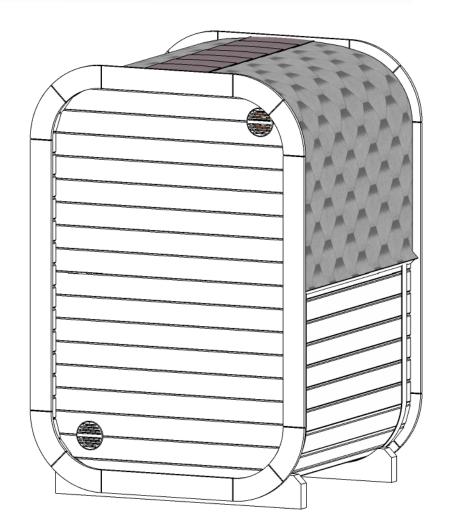


Note: Please read manual before construction

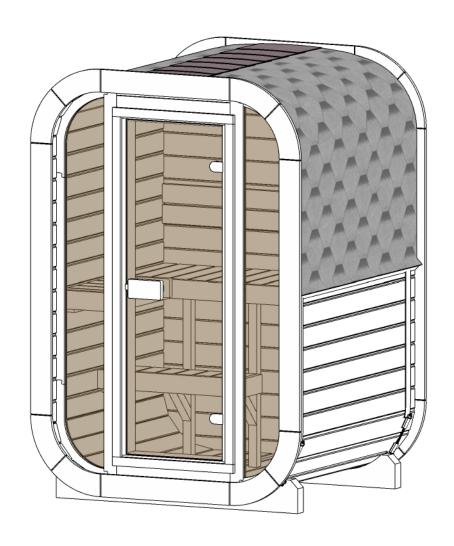

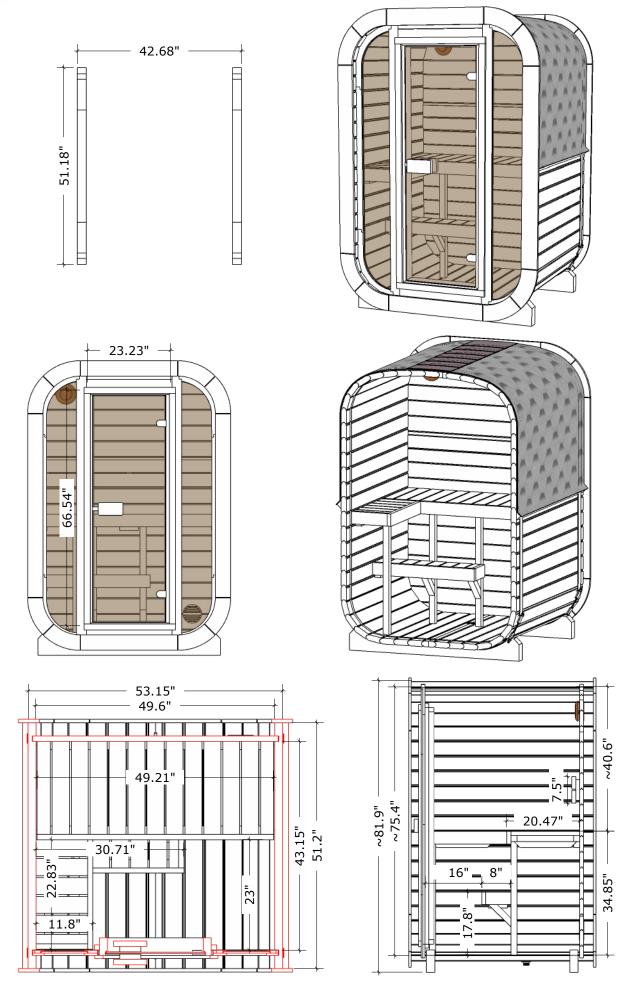

Tools needed

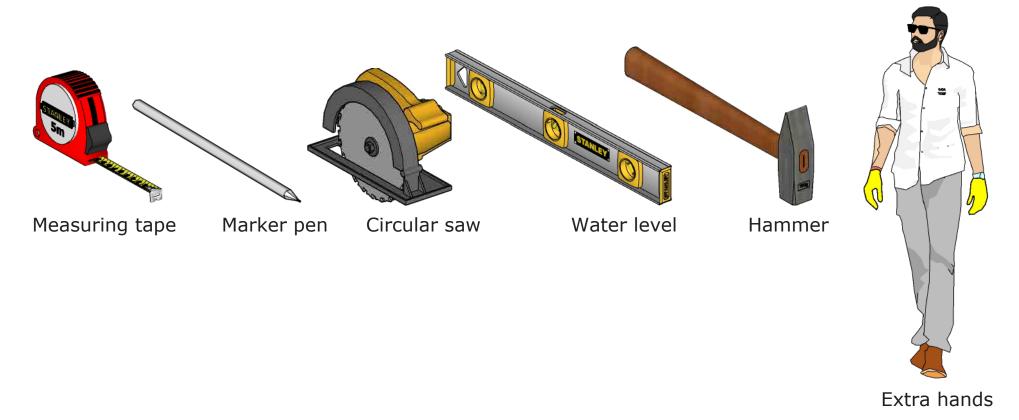





DET 1	x2	51.18" *7" *2.68"	
Article.		51.18	
JALG.UL.t			
DET 2	x1	51.18" *4.33" *1.65"	
Article.		51.18" *4.	
K130.TRW2.pp.UL			
DET 3	x55	51.18" *4.17" *1.65"	
Article.		51.18" *4.11	
K130.103T7.TRW2	•		
DET 6	x2	51.18" *2.32" *1.65"	
Article.		18" *2.32	
K130.T7.TRW2.s.U	JL	53.	
DET 6c/d/e/f	x1	.65	X 1"
		52.18" ** 1.65" 1 1 1 1 1 1 1 1 1	□ \$ 3/8"
Article. K130.T7.TRW2.s26. K130.T7.TRW2.10 K130.T7.TRW2.20 K130.T7.TRW2.30			1 3/16"
DET Sa	x1	1,11,07,1	
Article.		16.14" *13.54" *1.01	
ES.UL.H1.A.d			
DET Sb	x1	16.14" *13.54" *1.07"	
Article.		16.14" *13.	
ES.UL.H1.B.d			
DET Ta	x1		
Article.		24" *6" *1.1"	
ES.UL.H1.610.TRV	V.d	24"	
DET Tb	x1		
Article.		24" *3.54" *1.1	
D.28.90.610.TRW.	d	24	


	J G G 1 1 G	32D X 34VV X	Details list 2/4
DET Y	x1	үз	
Article.		Y1	*1.1"
TS.UL.H1.TRW.2A		51.1"	
DET U1	x1	." *0.71"	
Article.		49.02" *3.54" *0.71"	
D.18.90.1245.WW			
DET U2	x2	." *0.71"	
Article.		13.23" *3.54" *0.71"	
D.18.90.1860.WW			
DET 10a	х3	*1.73	
Article.		17.72" *1.73" *1.73"	
D.44.44.450.TRW.	2x45	1.	
DET 10c	x2	*1.73"	
Article.		5.24" *1.73" *1.73"	
D.44.44.133.TRW		,	
DET 11a	x2	32" *1.73"	
Article.		32"*1.73	
D.44.44.813.TRW			
DET 11b	x1	"*1.73"	
Article.		32" *1.73" *1.73"	
D.44.44.813.TRW.	1x10		101
DET 11c	x2	2"*1.73"	
Article. D.44.44.250.TRW.2	Py45	9.84" *1.73" *1.73"	
DET 10			
DEI 10	x1	49.21" *20.47" *2.83"	
Article.		49.21	
L.520.1250.TAS.UL			
DET 12	x1	*2.83"	
Article.		22.83" *11.81" *2.83"	
L.300.580.TAS.UL			


DET 11	CL3G Galagoi		320 X 34VV X	Details list 3/4
DET 14 Article. SST.190.1220.TAS.UL DET 21 X1 Article. D590/1690PR8 DET 21c X2 Article. D.28.28.1690.WW.d DET 21d X2 Article. D.28.28.646.WW.d DET 21a X2 Article. D.18.44.1670.WW.d DET 21b X2 Article. D.28.28.660.WW.d DET 22b Article. D.28.28.660.WW.d DET 21b X2 Article. D.28.28.660.WW.d DET 21b X2 Article. D.28.28.660.WW.d DET 22b X2 Article. O.20.28.660.WW.d DET 22b X2 Article. O.20.28.660.WW.d DET 25b X4 Article. OUL.WW.285.d DET 25b X4 Article.	DET 11	x1	27" *2.83"	
DET 14 Article. ST. 190, 1220, TAS.UL DET 21 x1 Article. D.590/1690PRS DET 21c Article. D.28 28, 1690 WW.d DET 21d Article. D.28 28, 646, WW.d DET 21a Article. D.28 28, 646, WW.d DET 21b Article. D.28 28, 660, WW.d DET 22b Article. D.28 28, 660, WW.d DET 22b Article. D.28 28, 660, WW.d DET 22c Article. D.28 28, 660, WW.d DET 25b X4 Article. O.UL WW.285.d DET 25b X4 Article.			30.71" *8.01	
Article. ST.190.1220.TAS.UL DET 21 x1 Article. D590/1690PR8 DET 21c x2 Article. D.28.28.1690.WW.d DET 21d x2 Article. D.28.28.646.WW.d DET 21a x2 Article. D.18.44.1670.WW.d DET 21b x2 Article. D.20.28.660.WW.d DET 22 x2 Article. D.20.28.660.WW.d DET 22 x2 Article. D.20.28.660.WW.d DET 25b x4 Article. O.UL. WW.285.d DET 25b x4 Article.		1	7	
ST.190.1220.TAS.UL DET 21 x1 Article. D590/1690PR8 DET 21c x2 Article. D.28.28.1690.WW.d DET 21d x2 Article. D.28.28.646.WW.d DET 21a x2 Article. D.18.44.1670.WW.d DET 21b x2 Article. D18.28.660.WW.d DET 22 Article. VN.1300.WW.t DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article.	DET 14	x1	"*1.48" * 2.2"	
DET 21 Article. D590/1690PR8 DET 21c x2 Article. D.28.28.1690.WW.d DET 21d x2 Article. D.28.28.646.WW.d DET 21a x2 Article. D.18.44.1670.WW.d DET 21b x2 Article. D.28.28.660.WW.d DET 22 Article. D.28.28.660.WW.d DET 25a Article. O.UL.WW.285.d DET 25b x4 Article.			48.03	
Article. DET 21c Article. D.28.28.1690.WW.d DET 21d Article. D.28.28.646.WW.d DET 21a Article. D.18.44.1670.WW.d DET 21b Article. D.28.28.660.WW.d DET 21b Article. D.28.28.660.WW.d DET 22b Article. D.28.28.660.WW.d DET 22 Article. D.28.28.660.WW.d DET 22 Article. D.28.28.660.WW.d DET 25b Article. O.U.L.WW.285.d DET 25b X4 Article.	ST.190.1220.TAS.0	JL	4	
Article. D590/1690PR8 DET 21c x2 Article. D28.28.1690.WWd DET 21d x2 Article. D28.28.646.WW.d DET 21a x2 Article. D.18.44.1670.WW.d DET 21b x2 Article. D.28.28.660.WW.d DET 22 Article. D28.28.660.WW.d DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article.	DET 21	v1		
### Article. ### D590/1690PR8 DET 21c		~1	*23.23	
DET 21c Article. D.28.28.1690.WW.d DET 21d X2 Article. D.28.28.646.WW.d DET 21a X2 Article. D.18.44.1670.WW.d DET 21b X2 Article. D.28.28.660.WW.d DET 22 Article. D.28.28.660.WW.d DET 25b X4 Article. O.UL.WW.285.d DET 25b X4 Article.			66.54	
Article. D 28.28.1690.WW.d DET 21d X2 Article. D 28.28.646.WW.d DET 21a X2 Article. D 18.44.1670.WW.d DET 21b X2 Article. D 28.28.660.WW.d DET 22 Article. D 28.28.660.WW.d DET 25a X16 Article. O UL.WW.285.d DET 25b X4 Article.	D590/1690PK8	1		
DET 21d	DET 21c	x2	,*1.1"	
DET 21d x2 Article. D.28.28.646.WW.d DET 21a x2 Article. D.18.44.1670.WW.d DET 21b x2 Article. D.28.28.660.WW.d DET 22 x2 Article. VN.1300.WW.t DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article.			66.5A" *1.1	
Article. D.28.28.646.WW.d DET 21a x2 Article. D.18.44.1670.WW.d DET 21b x2 Article. D.28.28.660.WW.d DET 22 x2 Article. VN.1300.WW.t DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article.	D.28.28.1690.WW.d	1		
DET 21a x2 Article. D.18.44.1670.WW.d DET 21b x2 Article. D.28.28.660.WW.d DET 22 x2 Article. VN.1300.WW.t DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article.	DET 21d	x2	1" *1.1"	
DET 21a x2 Article. D.18.44.1670.WW.d DET 21b x2 Article. D.28.28.660.WW.d DET 22 x2 Article. VN.1300.WW.t DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article.			25.43" *1.1	
Article. D. 18.44.1670.WW.d DET 21b X2 Article. D. 28.28.660.WW.d DET 22 X2 Article. VN. 1300.WW.t DET 25a Article. O. UL. WW. 285.d DET 25b X4 Article.				
DET 21b	DET 21a	x2	21, *0.71,	
DET 21b	Article.		65.15" *1.13	
Article. D.28.28.660.WW.d DET 22 Article. VN.1300.WW.t DET 25a Article. O.UL.WW.285.d DET 25b X4 Article. 31.13**0.71* 11.22** 11.22** Article. 33.18***173**173**173** 11.22** 11.22** Article.		1		
DET 22 Article. VN.1300.WW.t DET 25a Article. O.UL.WW.285.d DET 25b X4 Article. 51.3" *4.33" *071"	DET 21b	x2	.4"	
DET 22 Article. VN.1300.WW.t DET 25a Article. O.UL.WW.285.d DET 25b X4 Article. 51.3" *4.33" *071"	Article.		13" *0.71	
DET 22 Article. VN.1300.WW.t DET 25a Article. O.UL.WW.285.d DET 25b X4 Article. 51.3" *4.33" *071"		1	26" *1.1	
DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article. 51.5" *A.33" *0.11"		_	^	
DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article. 51.5" *A.33" *0.11"	JL1 22	x2	. 13" *1.13"	
DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article. 51.5" *A.33" *0.71"	Article.		£1.18"*1.	
DET 25a x16 Article. O.UL.WW.285.d DET 25b x4 Article. 51.5" *A.33" *0.71"	V/N/ 1300 IA/IA/ +		3	
Article. O.UL.WW.285.d DET 25b Article. 51.5" *A.33" *0.71"		v16		44.22"
O.UL.WW.285.d DET 25b x4 Article. 51.5" *A.33" *0.71"	J11 154	XIO	1=11.22"	11.22"
DET 25b Article. x4 51.5" * 4.33" * 0.71"	Article.			
Article. \$1.5" *A.33" *0.71"			·	\vee
	DET 25b	х4	*0.71"	
	Article.		51.5" *4.33"	
	D.18.110.1308.WW	.d		


DET 25c		52D" x 54W" x	Details list 4
DET 25C	x4	*0.71"	
Article.		21.2" *4.33" *0.71"	
D.18.110.691.WW	/.d		
Underlay felt	3,1 m.	.0"	
Article.		122" *59"	
A.KATE.3,1			
DET N	х6	·	
Article.			
KAT-HAR-MUST			
DET O	x37		
Article.			
KAT-SIN-MUST			
DET A2	x2		
			~243.9"
Article. V.RST.UL.2xAL			
			I .
DET W	x1		
	kmpl	W2 W1	
Article.		W3	
TRAPP		₩4	
DET V	x4	-" * 1"	
Article.		1.58" *1.58" * 1"	
KI-VIN-25/40/40-ZI	v		
DET G	x1		
Article.			
MU-VENT-PU			
DET F	х3	Black	
Article.			
MU-VENT-ZN-MUS	5		
Article.		D. F.	Article.
		D 🕻 E 🐧	F I II 130 H1 m

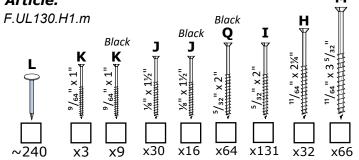


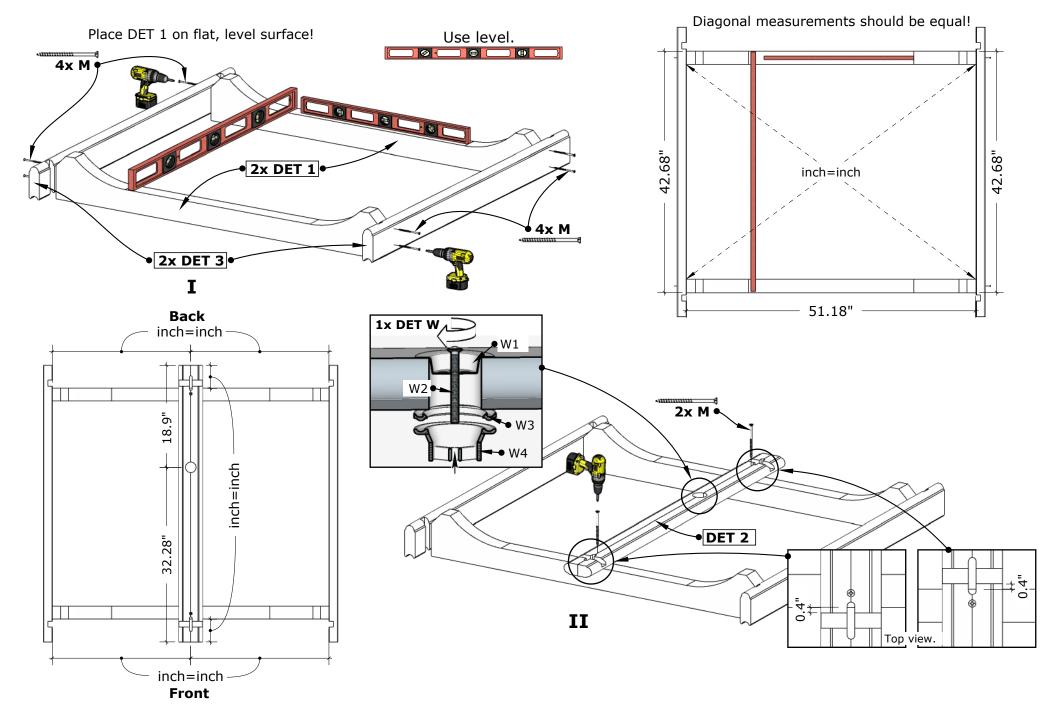


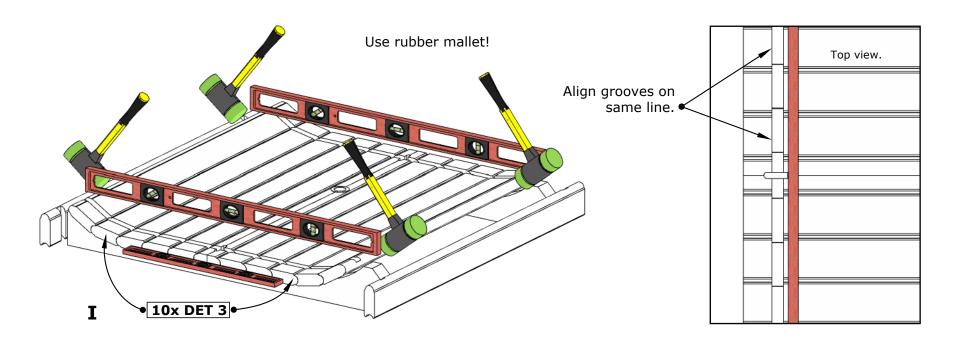


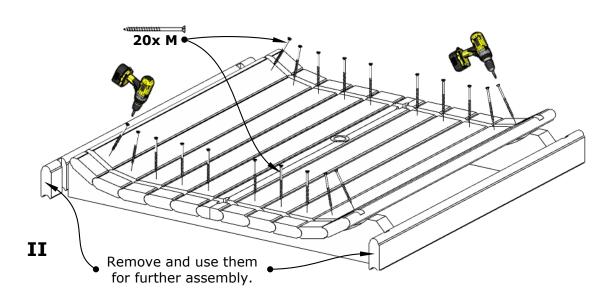

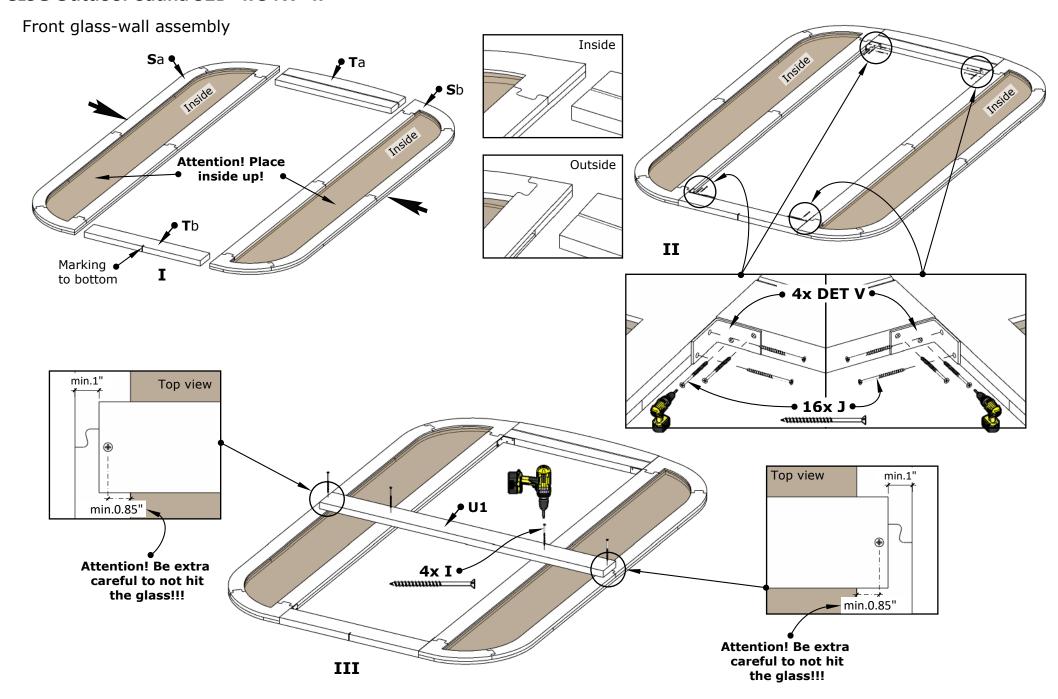


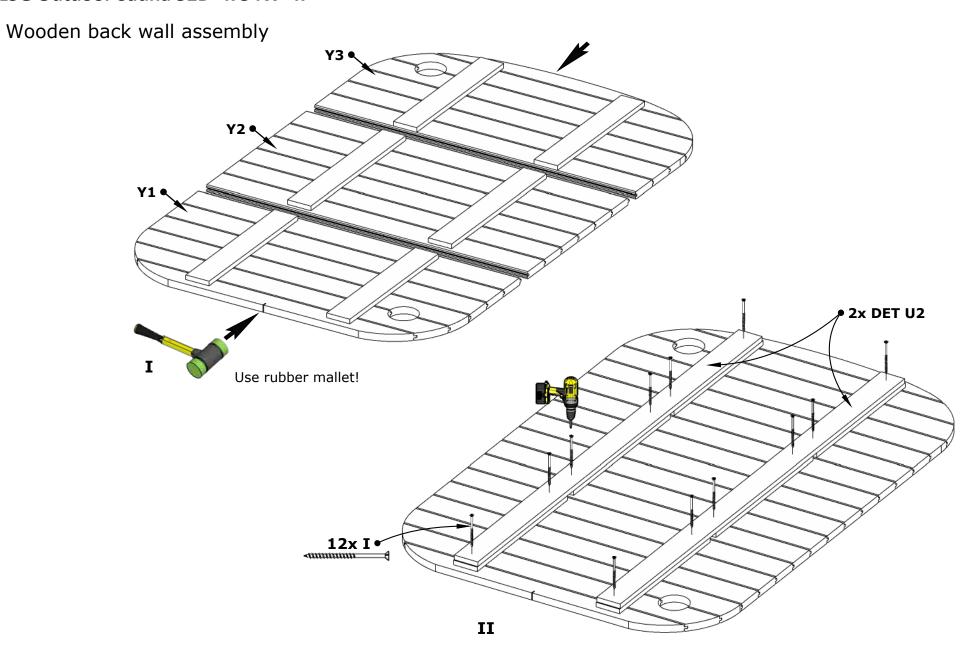


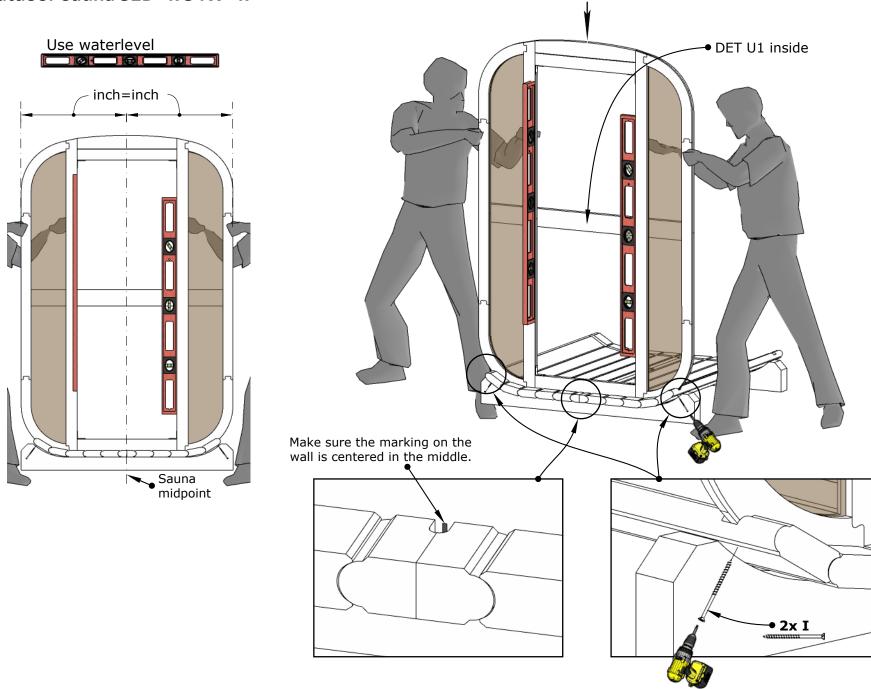


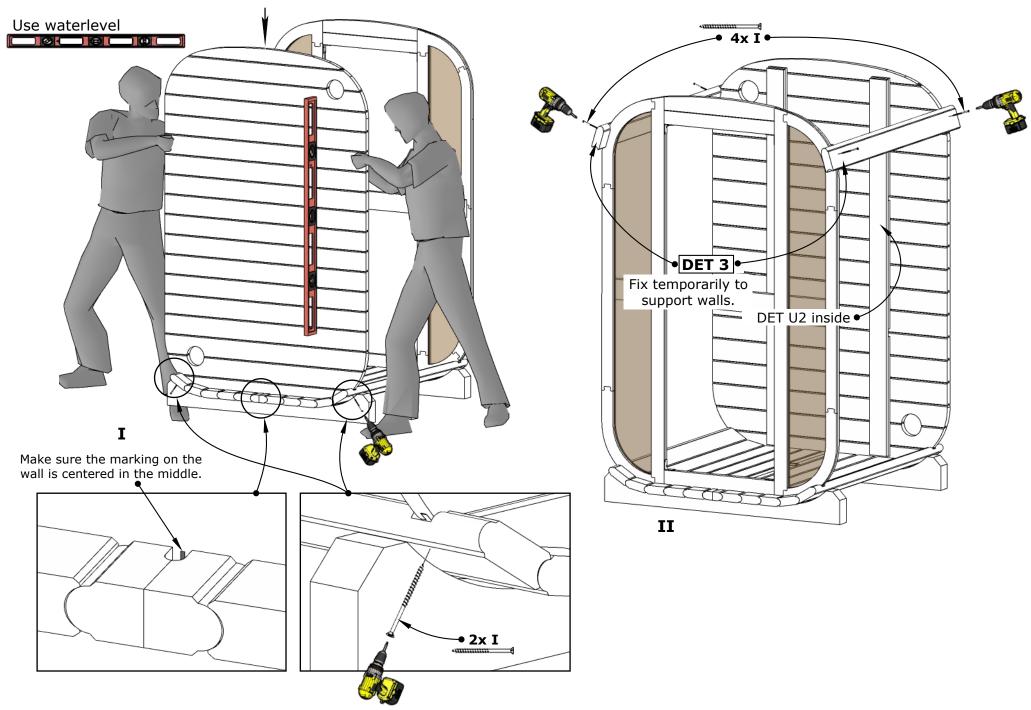



6.

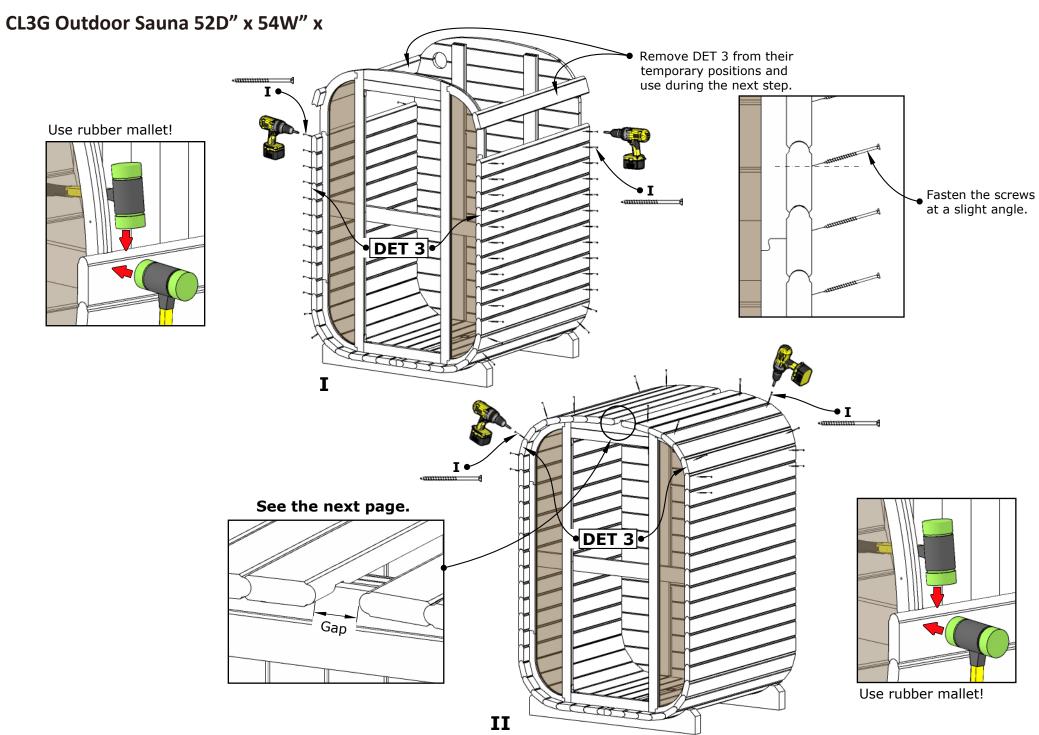

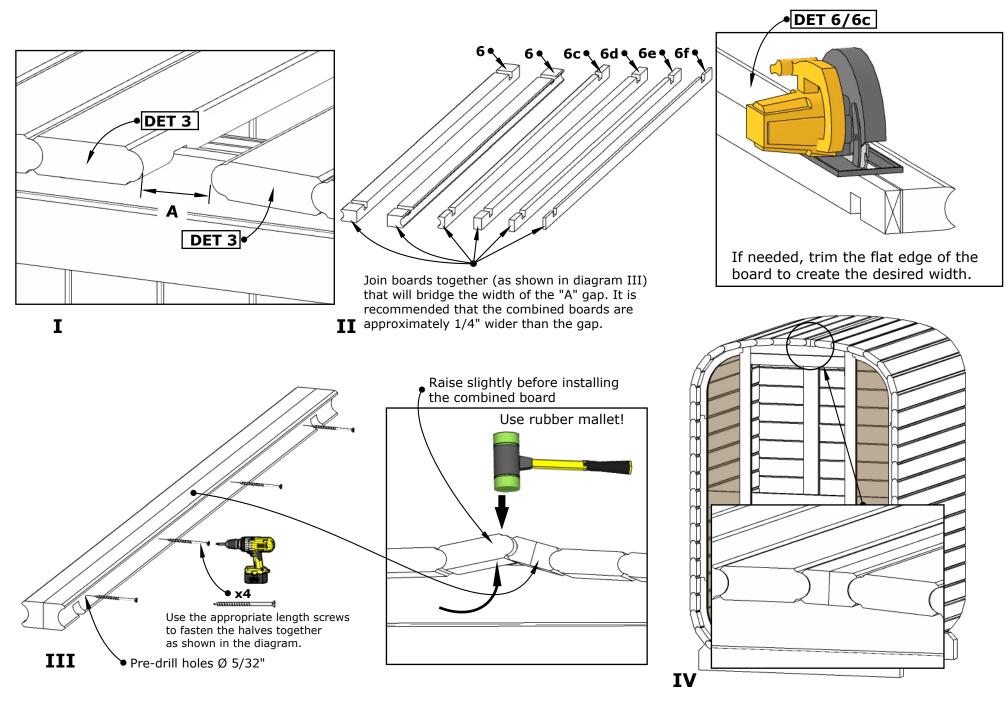


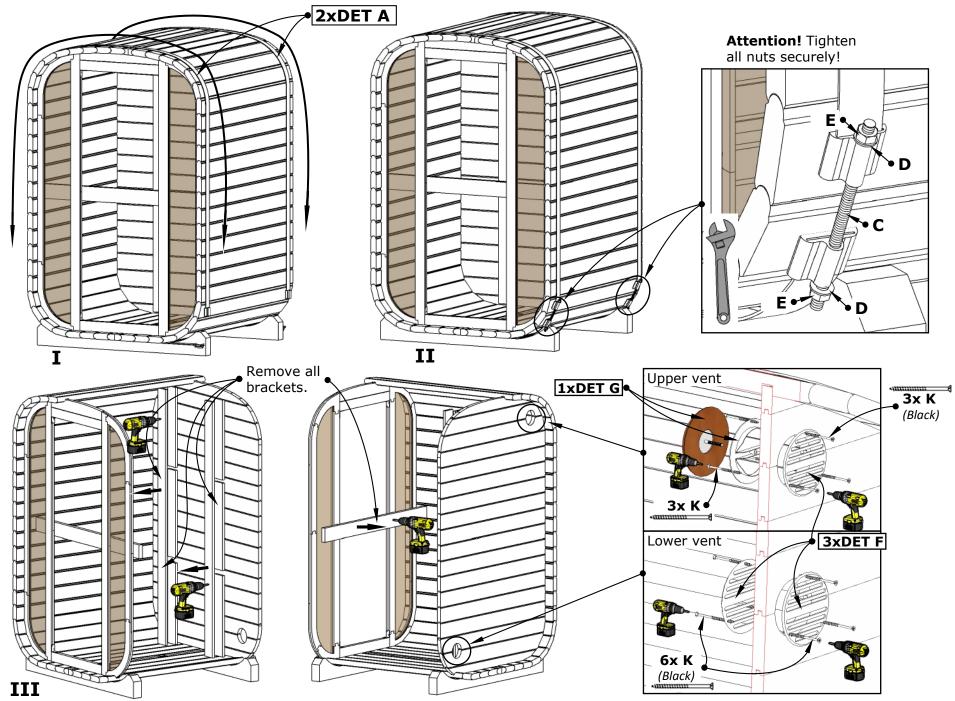


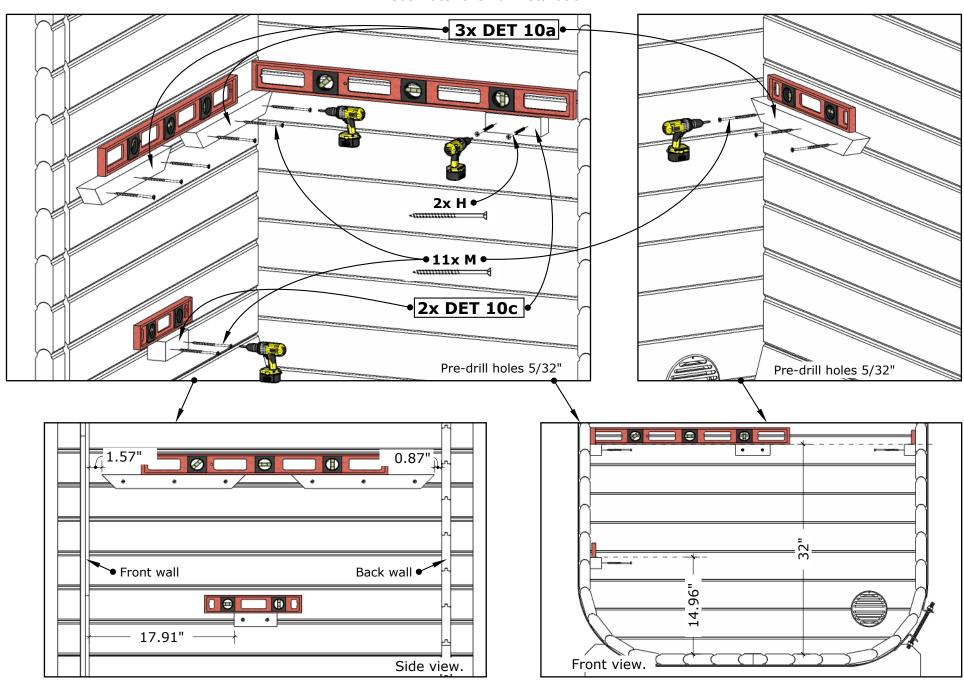

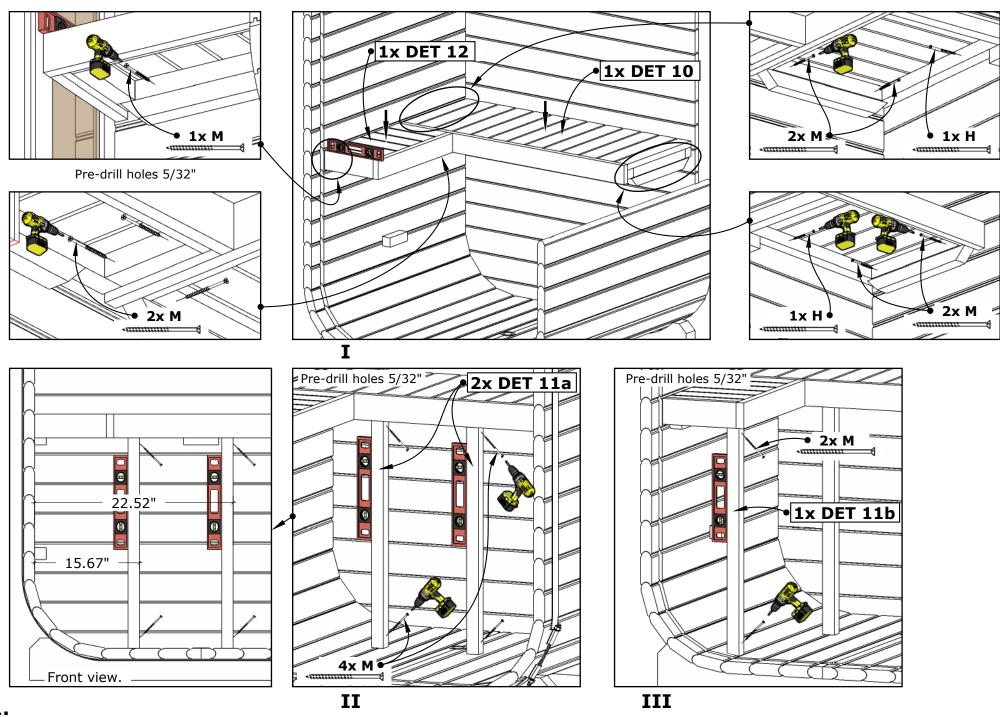

11.

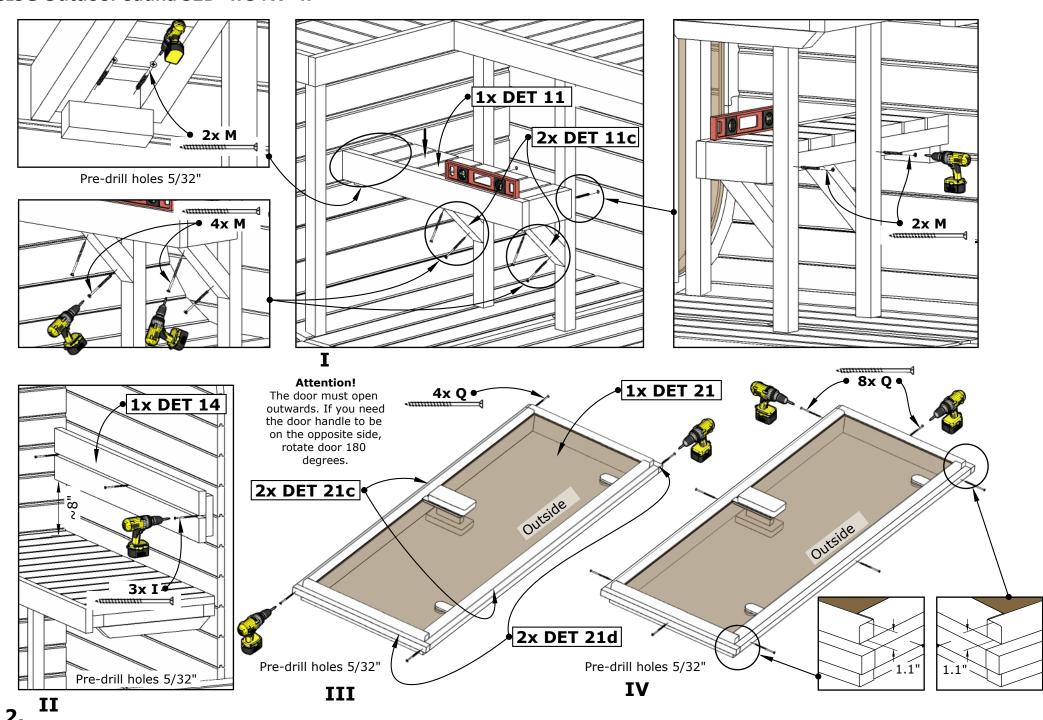

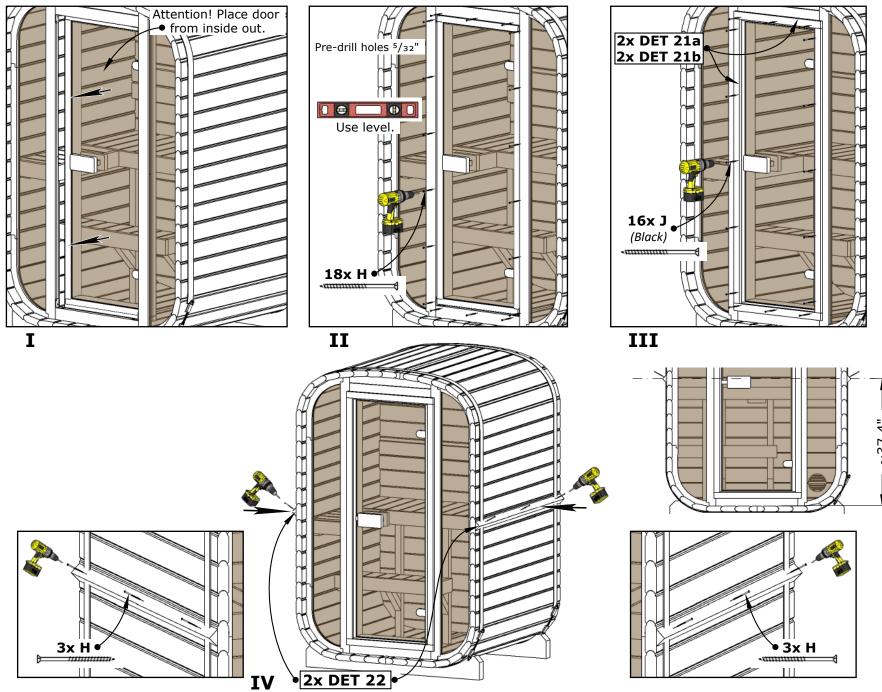



13.

CL3G Outdoor Sauna 52D" x 54W" x Underlay felt installation manual. Cut off ~2" ~2" over the edge. over the edge. Turn end to Clamp end the edge. to the edge.


Cut off the parts that extend over the edge.

ΙΙ

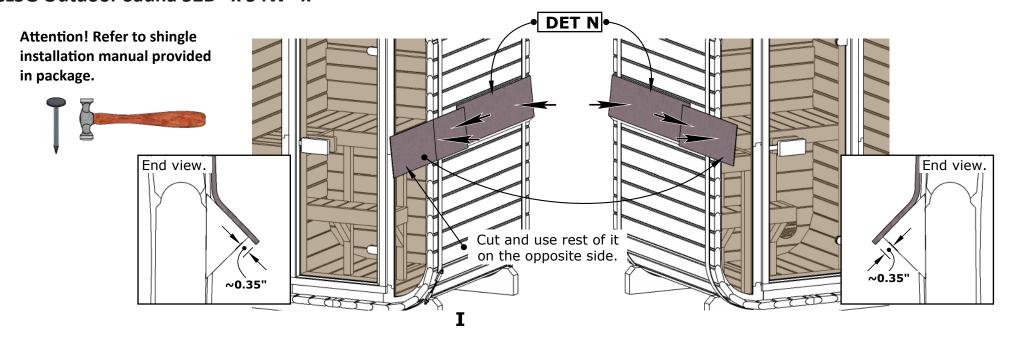


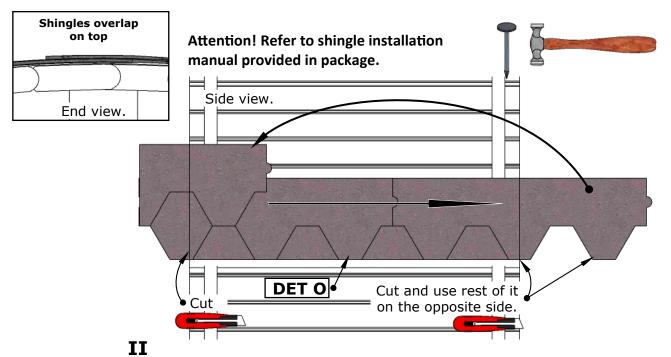

Attention! Refer to shingle installation manual provided in package.

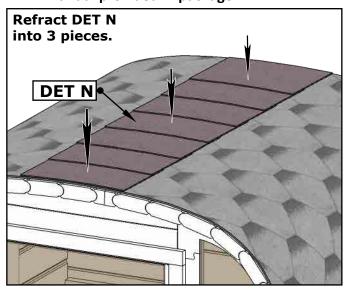

III

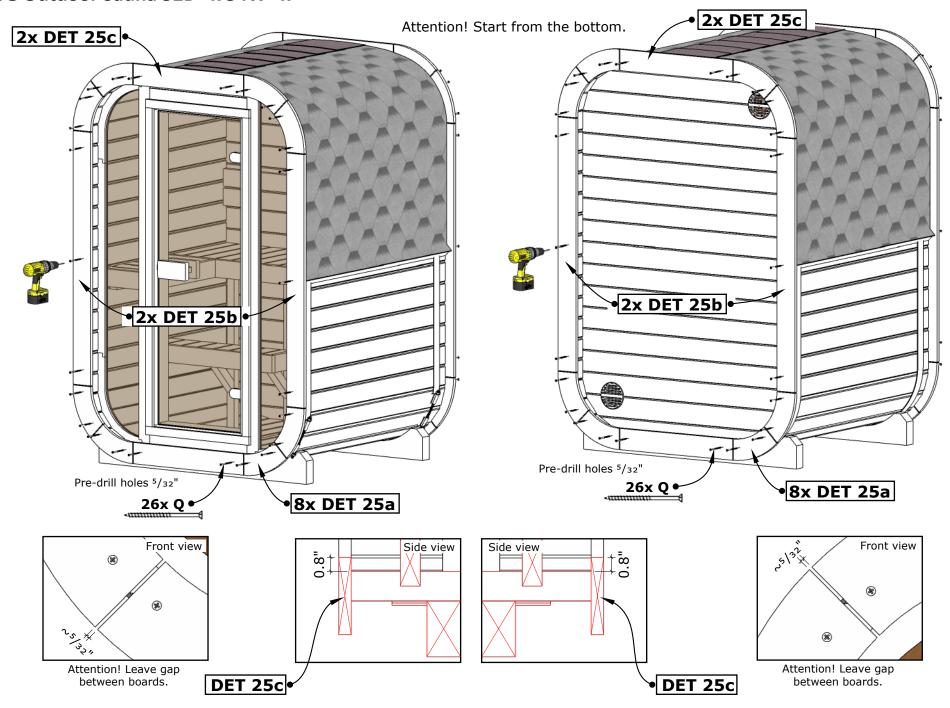

Installation Instructions

When building a wooden product, it is important to follow all installation instructions to ensure the quality and durability is guaranteed.

Important!

Identification number of the Product / Serial Number: 123456789

Must be accompanied by the serial number to identify the product.

General Installation

Careful handling: Treat all wooden parts with care during assembly to avoid scratches or friction.

Level foundation: Ensure the sauna sits on a stable, level foundation for proper door and window operation. Ensure the base has enough stability to support the sauna.

Proper drainage: Avoid constant water exposure to wooden materials.


Electrical and plumbing: Hire qualified professionals for electrical work, including heater and lighting installation.

Wood treatment: It is recommended to treat all wooden parts after assembly.

Door and Window Maintenance

Regular checks: Regularly inspect window and door hinges and locks. Tighten loose components and lubricate as needed.

DOOR ADJUSTMENT INSTRUCTIONS

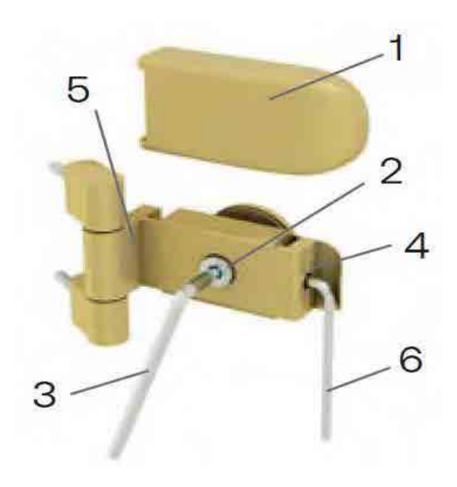

You will need 3-mm (6) and 5-mm (3) hexagon keys for adjusting the hinges. Remove the plastic covers from the hinges (1). Loosen the fixing screws (2) one turn (do not remove the glass). If needed, the door can be shimmed up a bit from here vertically. If it needs to be adjusted left or right, turn the screws (4 & 5) as required. If one screw is turned counterclockwise, the other must be turned clockwise. Make sure both screws are tight when you have completed this step. Then tighten the fixing screws (2) when adjusted.

Wood Protection and Maintenance

Protective coating: Apply a wood preservative at least once a year (or more often) to improve resistance to dirt and moisture, make cleaning easier, and extend the lifespan of the product.

Adjusting wick condition: Check and adjust the condition of the sauna's wicks (if applicable) a few times a year.

Sauna Heater and Stones

Heater and chimney installation: Follow the manufacturer's instructions for heater and chimney installation.

Cleaning heater stones: Wash new stones before placement to remove dust and chemicals.

Stone placement: Arrange stones according to the manufacturer's instructions, ensuring heating elements are not exposed.

First heating: The first heating must take place under supervision for two-hours to a temperature of about 210°F. The sauna must be well ventilated both during and after heating. This allows the wood to absorb finishing materials and form a protective layer.

Sauna Use

Firewood: Use dry firewood up to 12" long for wood-burning heaters.

Steam throwing: Throw water only on the heater, not on walls or benches.

Swimwear: Avoid wearing swimwear in the sauna to prevent damage to the benches from dripping water.

Seating comfort: Consider using seating pads for increased comfort on hot benches.

Cracked stones: Check the heater stones regularly, as they can crack over time. Replace or add stones as needed.

Sauna Cleaning After Each Use

Wipe down benches: Use a clean, damp cloth to wipe down the benches. Do not use running water to clean the bench or other wooden surfaces.

Cleaning products: Use suitable cleaning products specifically designed for sauna benches and other wooden parts.

Drying and ventilation: After cleaning, allow surfaces to dry completely and ensure proper ventilation. Run the heater for at least 30 minutes with the vent open and door/windows closed.

Sauna Maintenance - Yearly

Wood treatment: Re-treat wooden surfaces with a suitable product, especially for frequently used saunas.

Cleaning surfaces: Clean all surfaces with a soft brush/cloth and a designated cleaning agent according to the product's instructions.

Heavy stains: For stubborn stains, lightly sand the area before re-treating with wood preservative.

Avoid unsuitable products: Avoid paints, varnishes, harsh disinfectants, or pressure washers, as these can damage the wood.

Hardware checks: Inspect bench and support mountings. Tighten loose screws if necessary, as wood can loosen due to heat and moisture fluctuations.

What to Avoid in Your Sauna

Drying textiles: Avoid drying textiles in the sauna due to fire hazards and potential wood damage from excessive moisture.

Excessive heat: Don't exceed the maximum temperature specified by the heater manufacturer to prevent fire hazards and wood warping.

Cleaning methods: Avoid using pressure washers or excessive running water, as this can permanently damage the wood structure.

Wood Characteristics in Saunas

Natural changes: Wood is a natural material that may crack or warp slightly due to temperature fluctuations. This is normal in saunas with extreme temperature and humidity changes.

Deformation factors: The risk of wood deformation depends on the material, usage intensity, and is more noticeable with wider boards.

Darkening wood: Wood in areas exposed to hot steam may darken over time.

Wood Smell: Thermally treated wood has a characteristic smell that diminishes over time but does not completely disappear. In a sauna, the smell weakens faster if it is heated for a long time and aired at the same time. The smell is softened by treating the wood with a suitable wood oil or wood care product. Do not wash untreated thermal wood with water, as this will make the smell stronger.